

ILLUSTRATIVE DTLS. ONLY
EXT. OR INT. FINISHES
NOT BY NUAIR

TYPICAL ANCHORS
SEE ELEV. FOR SPACING

1/4" MAX.
SHIM
3/8"

--- WEATHER RESISTANT BARRIER
--- FLEXIBLE FLASHING

WEATHERPROOFING:
FLEXIBLE FLASHING SHOULD BE INSTALLED
IN A WEATHERBOARD FASHION. THE TOP
LAYER SHOULD OVERLAY ANY LAYER
UNDERNEATH IT. THE WEATHER RESISTANT
BARRIER SHOULD THEN COVER THE
FLEXIBLE FLASHING AT THE HEADER. THE
APPLICATION OF THE WEATHER RESISTANT
BARRIER WILL VARY BASED ON WHEN IT IS
INSTALLED. IF INSTALLED AFTER THE
WINDOW, IT SHOULD BE TUCKED UNDER
THE SILL FLASHING AND OVERLAP THE
JAMBS AND HEAD FLASHING.

TYPICAL ANCHORS:


#8 X 1-3/4" SMS OR DRYWALL SCREWS
INTO WOOD FL # 0027689
1-3/8" MIN. PENETRATION INTO WOOD

#10 SMS OR SELF DRILLING SCREWS
INTO APPROVED MULLIONS
(NO SHIM SPACE)

WOOD BUCKS NOT BY NUAIR, MUST SUSTAIN LOADS
IMPOSED BY GLAZING SYSTEM AND TRANSFER THEM
TO THE BUILDING STRUCTURE.

FAILURE TO SUPPORT THE FRAME USING
SHIMS AT EACH FASTENER MAY RESULT IN
GLASS BREAKAGE. INSTALLER MUST USE A
HIGH-QUALITY, ADHESIVE CAULK UNDER THE
FIN OR FLANGE.

FIN FRAME WINDOW

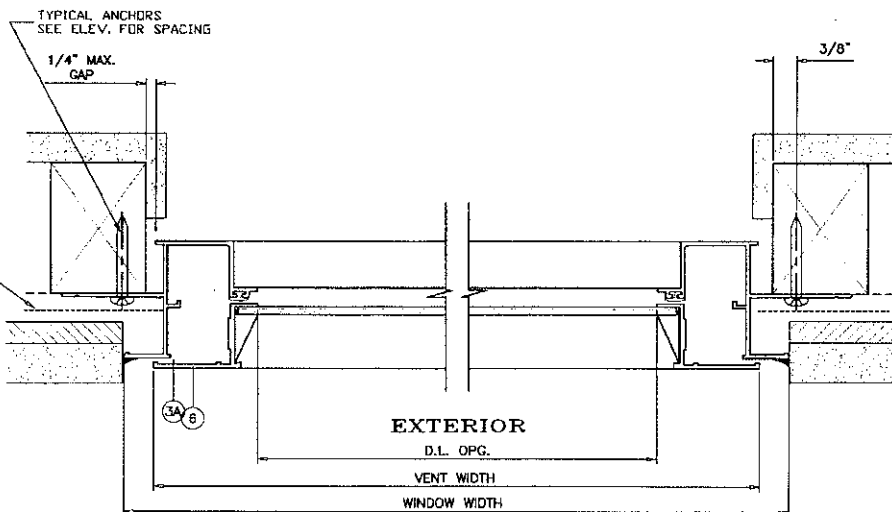

TYPICAL ANCHORS
SEE ELEV. FOR SPACING

1/4" MAX.
GAP

3/8"

EXTERIOR

D.L. OPG.

VENT WIDTH

WINDOW WIDTH

APPROVED MULLION
SEE SEPARATE NOA

#10 SMS
SEE ELEV. FOR SPACING

ANCHORS TO BE SPACED AS FOLLOWS:
-ALL ANCHORS NO MORE THAN 4"
FROM EACH CORNER.

-1/4" MASONRY ANCHORS TO BE NO
LESS THAN 23" CENTER TO CENTER,
OR AT PRE-PUNCHED LOCATIONS.
-SM SCREWS INSTALLED THROUGH FIN
FRAMES TO BE NO LESS THAN 22"
CENTER TO CENTER.
-DECKING SCREWS INSTALLED THROUGH
FIN FRAMES TO BE NO LESS THAN 10"
CENTER TO CENTER.

AND SEALED TO BE VALID.

James B. Whittum, P.E.
FL # 0027689
8533 Acorn Ridge Ct.
Tampa, Florida 33625
813-926-9719

THIS DOCUMENT MUST BE SIGNED

James B. Whittum
SEP 16 2005

INS

NUAIR

ALUM. AWNING WINDOW (NON-IMPACT)

NUAIR WINDOWS AND DOORS
8105 ANDERSON ROAD
TAMPA, FL. 33684

TEL. (800) 282-6627 FAX (813) 886-9737

REV.	DATE	BY	DESCRIPTION

date: 09/08/05
scale: 1/2" = 1"
dr. by: JR
chk. by:

drawing no.
AWN
SHEET 3